


## Miniaturised differential pressure sensor

2,4mm up to 100C°

MP-2.40-TIG-YYY-D-ST-ZZ-XX

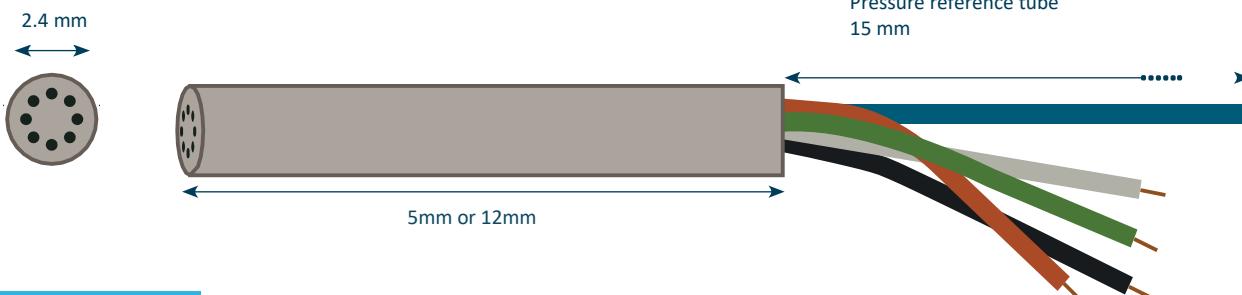

### MODEL DEFINITION

**TIG** : Inconel tube with grid is the standard product

**YYY**: pressure range in psig (005, 015, 030, 080, 150)

**D** : differential pressure measurement

**ST** : standard temperature up to 100C°

**ZZ**: length of the tube (05, 12)

**XX**: **00**: Unshielded wires

**01**: Shielded wire

### WIRE COLOR CODE

<b>BLACK</b>	Input -
<b>RED</b>	Input +
<b>WHITE</b>	Output -
<b>GREEN</b>	Output +

## FEATURES

- Reduced size : Ø 2.4 mm
- Integrated field shield
- Temperature range : up to 100°C
- Full scale range of 5 to 150 PSI
- Customized solution possible mVolt output
- Highest resonance frequency on the market
- Unshielded wires : UAA-3601-WH/...-BK/...-RD/...-GR  
Or  
Shielded wire: TAU-3607.04
- Wire length: 1m
- Amplification can be done for a special request

Ideal for dynamic pressure measurement



## APPLICATIONS

### MEDICAL

- Patient monitor
- Oxygen Concentrators
- Fluid Evacuation

### AEROSPACE

- Ideal for Wind Tunnel aerodynamic measurement

### INDUSTRIAL

- Industrial Controls
- Compressors & Pumps
- Oil-Filled Package

### AUTOMOTIVE

- Diesel Particulate Filter
- Exhaust Gas Recirculation
- Automotive Systems

## Resonance frequency

- Highest resonance frequency of 310 KHz of the market
- The tests have been done on a Polytec MSA-500 using Scanning laser-Doppler vibrometry.

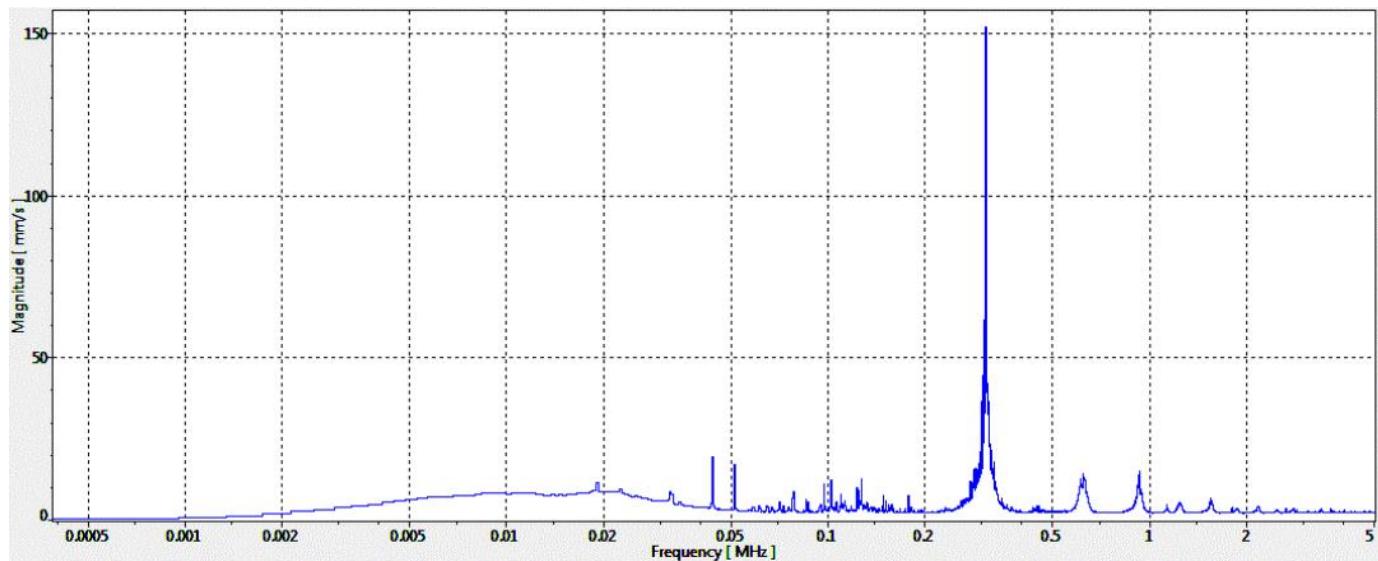


Figure 1: Result for the 30 PSI MEMS differential pressure sensors



Miniaturized aerodynamic flow measurement

PART NUMBER

MP-2.40-TIG-YYY-D-ST-ZZ-XX

Pressure Range	Proof Pressure	Burst Pressure		
0 → 5 PSIG	25 PSI	40 PSI		
0 → 15 PSIG	45 PSI	75 PSI		
0 → 30 PSIG	90 PSI	150 PSI		
0 → 80 PSIG	240 PSI	320 PSI		
0 → 150 PSIG	300 PSI	450 PSI		
Characteristic	Minimum	Typical	Maximum	Unit
Span <sup>4</sup>	0 → 5 PSIG	60	90	120
	0 → 15 PSIG	55	80	105
Zero Offset	-45	-10	25	mV
Bridge Resistance (RB)	4	5	6	kΩ
Pressure Hysteresis (d) <sup>1</sup>	-	<±0.1	-	%/FS
Thermal Hysteresis (d,f)	-	<±0.2	-	%/FS
Operating Temperature <sup>2</sup>	-		+100	°C
Max Excitation Voltage	-	-	10	V
TC Span <sup>3</sup>	-0.24	-0.19	-0.155	%/°C
TC Zero Offset <sup>3</sup>	-75	-	75	µV/°C
TC Resistance <sup>3</sup>	0.24	0.275	0.33	%/°C
Linearity - Topside <sup>1</sup>	-0.15	<±0.10	0.15	%/FS
Linearity - Backside	5 PSI	-0.3	<±0.2	0.3
	15, 30, 80, 150 PSI	-0.15	<±0.10	0.15

**Remark:**

- All sensors are provided with a control sheet given pressure level versus mVolt @25°C under a supply voltage of 5 Volt.
- Temperature measurement/compensation available. [See our tutorial on our website.](#)
- Conditioning system on request.
- Frequency > 300 KHz under vacuum condition.
- High robustness: specific protection on wire bonding @MEMS level (protection against particles, dust, condensation...) without impact on frequency measuring range.

<sup>1</sup> Accuracy @25 Celsius ; <sup>2</sup> TMCL qualification tests – JEDEC JESD22-A104 « temperature cycling » @ Tmax ; <sup>3</sup> @MEMS level; <sup>4</sup> Amplification can be done for a special request

**CONTACT****Operational Headquarter:** Rue des Ormes 151, B-4800 Lambermont, BELGIUM**TEL:** +32 87 70 96 69**Email:** sales@sensorade.be