


Signal conditioner

Up to 10V amplification

SC_MP_24_XX_4PIN

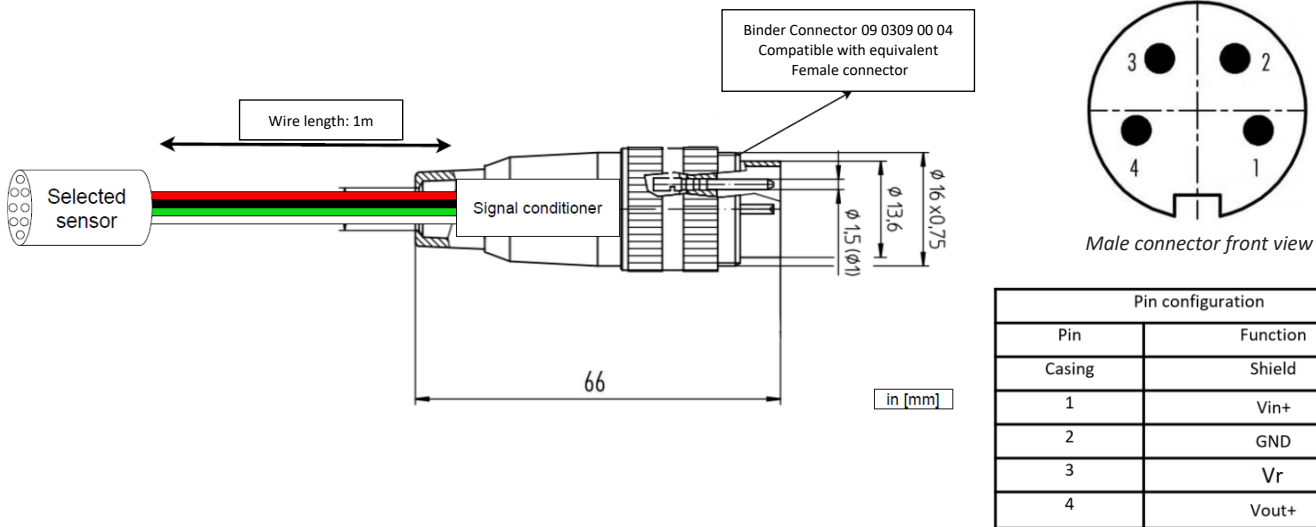

MODEL DEFINITION

SC: Signal conditioners
 MP: Miniaturized pressure
 24: Maximum input voltage in volt
 XX: Maximum output voltage in volt (05, 10)

OVERVIEW

- Can be used with our sensor
- Power supply up to 24V
- Output signal up to 10V
- Shielded wire for MMP and MHP: TAU-3219.04
- Shielded wire for others : TAU-3607.04
- Wire length: 1m

PRODUCT SPECIFICATION

Characteristics	Electrical characteristics	
	SC_MP_24_05_4PIN	SC_MP_24_10_4PIN
PART Number	SC_MP_24_05_4PIN	SC_MP_24_10_4PIN
Supply Voltage	12-24 VDC	12-24 VDC
Max Output Voltage	5 VDC	10 VDC
Bandwidth	0-100 kHz	0-100 kHz
Operating temperature	85 °C	85 °C
Maximum current	20mA	20mA

Remark:

- The selected sensors are available on our website. [See our tutorial on our website.](#)

CONTACT

Operational Headquarter: Rue des Ormes 151, B-4800 Lambermont, BELGIUM

TEL: +32 87 70 96 69

Email: sales@sensorade.be